


Southwire™

# CORD SOLUTIONS CATALOG

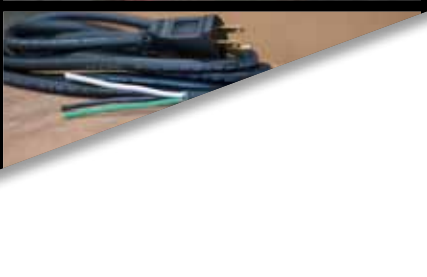

**BUILT FOR DURABILITY.  
BUILT FOR RELIABILITY.  
BUILT FOR WORK.™**

[SOUTHWIRE.COM](http://SOUTHWIRE.COM)

# OUR STORY

As a family business, Southwire proudly continues building on our commitment to environmental stewardship and corporate sustainability by prioritizing stakeholder expectations, and supporting the wellbeing of our communities and the environment in which we live. To help us meet this commitment, we organize our sustainability strategy around five core tenets: Growing Green, Living Well, Giving Back, Doing Right, and Building Worth.

## ***We Deliver Power...Responsibly®***

We remain committed to the sustainability of our company for the next 100 years and beyond. As we strengthen this commitment, we continue to work hard every day to discover, develop and distribute sustainable solutions that exceed the expectations of our stakeholders around the world.

## OUR MISSION

To be a **preferred provider** of solutions to the electrical industry by providing innovative products and services with exceptional quality.

## OUR VALUES

Our **ONE Southwire** culture prioritizes the interests of our team members, customers, and communities through a continuous commitment to empowerment, trust, consistency, and inclusion.

## OUR REACH

Nearly one in two new homes built in the United States contains our wire, and we produce half of the cable used to transmit and distribute electricity throughout the nation.


## OUR PRODUCTS

Our product teams and dedicated resources work together to listen to and work with our customers, creating solutions that deliver unparalleled value through product innovation, safety, and efficiency.

## OUR SERVICE

Service is more than a word or a phone number; it's a tangible support system that assists you through the entire project cycle; from our knowledgeable customer service team, to our experienced field sales team, we're there every step of the way.

---

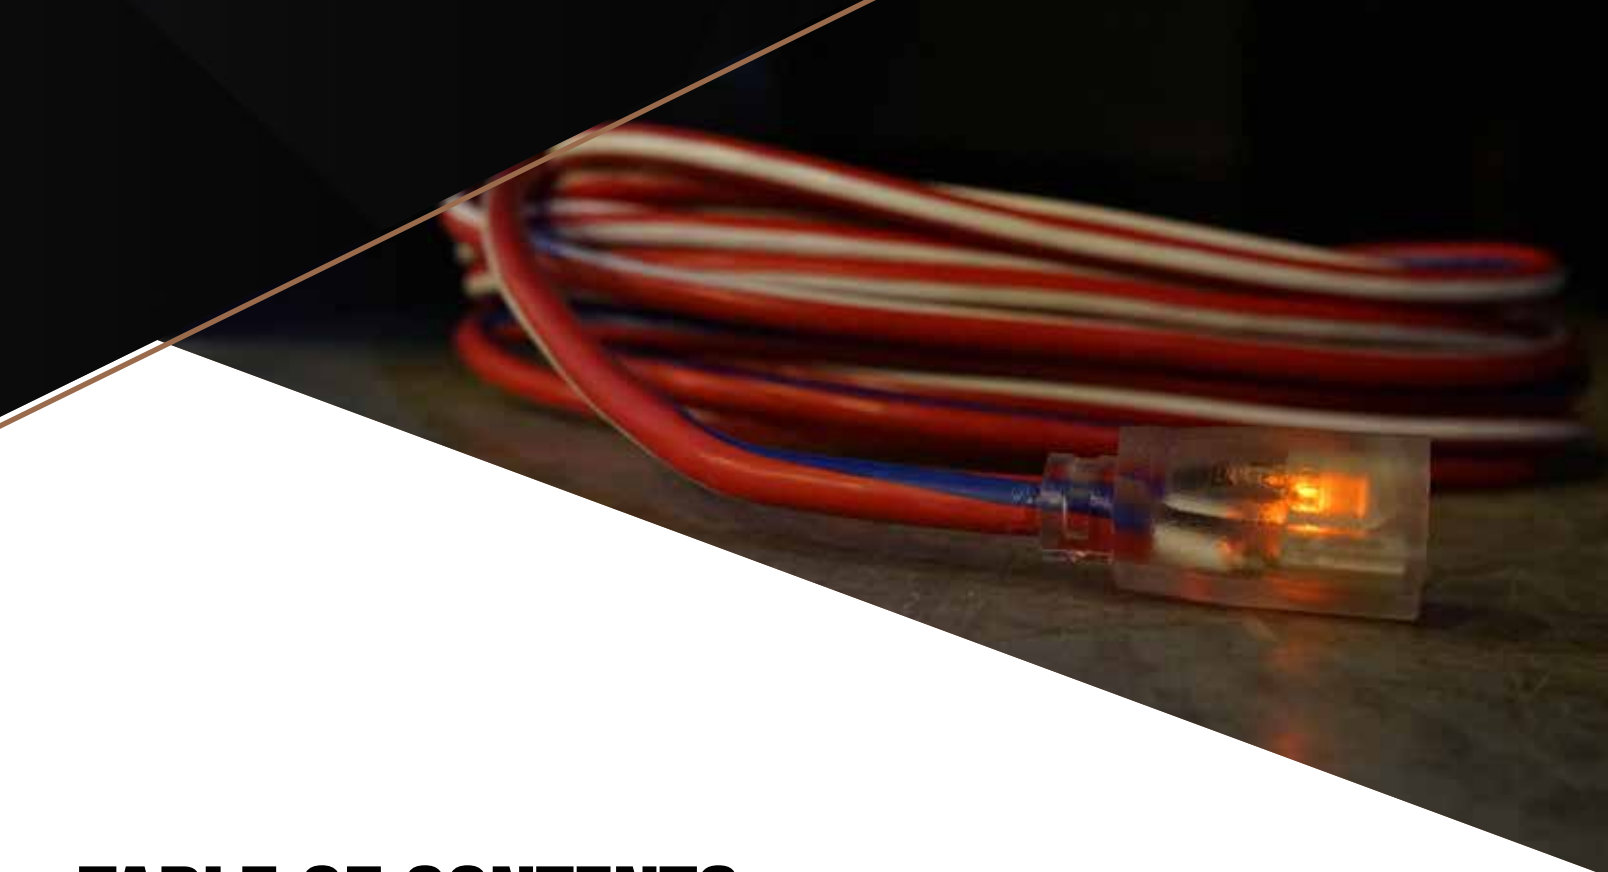

# TABLE OF CONTENTS

## CUSTOM CORDS

Custom Cord Programs..... 8

## OUTDOOR CORDS

Standard ..... 12

Red, White, & Blue ..... 15

Tri-Tap..... 16

20A 5-20..... 18

Heavy Duty..... 19

Multi-Outlet..... 20

Push-Lock..... 21

## COLD WEATHER CORDS

Polar/Solar™ Supreme..... 26

Polar/Solar™ ..... 27

ColdFlex™ ..... 30

## TWIST LOCK & GENERATOR CORDS

Twist Lock..... 34

Generator Adapters..... 35

Twist Lock Adapters..... 36

## SPECIALTY CORDS

Royal® Welding Cords..... 41

Oil Resistant Agripro™ Cords ..... 44

## RANGE, DRYER AND APPLIANCE

Range & Dryer ..... 47


Replacement..... 48

Appliance..... 50

## CORD MANAGEMENT AND REELS

Storage ..... 52

Reels..... 53

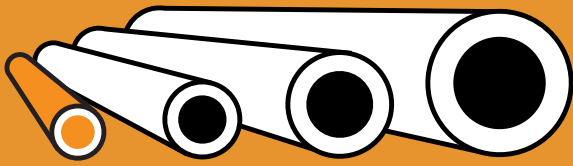


# 16 GAUGE


LIGHT DUTY

SUGGESTED USE

2-PRONG

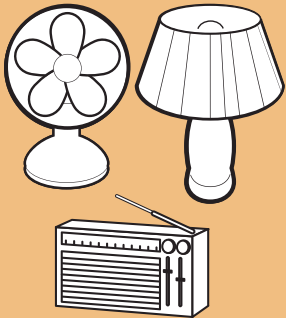

3-PRONG

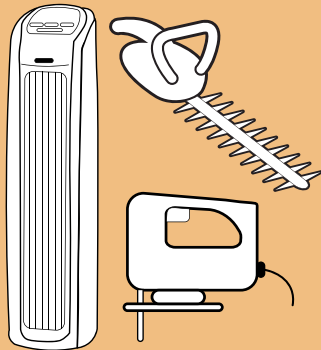

2-PRONG  
FANS  
SMALL APPLIANCES  
STEREOS

3-PRONG  
SPACE HEATERS  
HEDGE TRIMMERS  
JIG SAWS

AMP RATINGS

13  
AMPS


13  
AMPS

10  
AMPS

25'

50'


100'

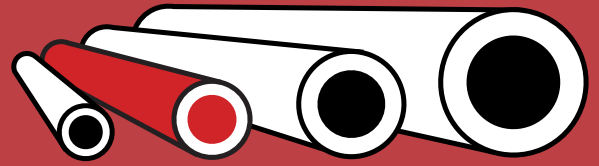

# 14 GAUGE

MEDIUM DUTY

SUGGESTED USE

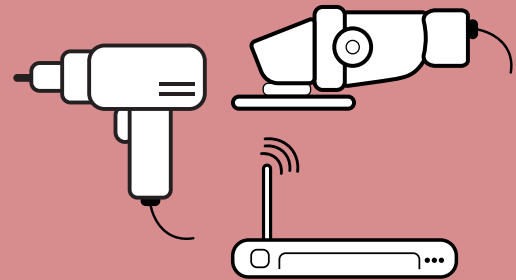

DRILLS  
BELT SANDERS  
ROUTERS

AMP RATINGS

15  
AMPS


15  
AMPS

13  
AMPS

25'

50'


100'



THE GAUGE OF AN EXTENSION  
CORD DETERMINES HOW MUCH  
ELECTRICITY IT CAN CARRY




THE SMALLER THE NUMBER  
OF THE GAUGE, THE MORE  
ELECTRICITY IT CAN CARRY

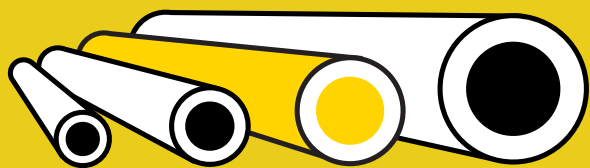

# 12 GAUGE

HEAVY DUTY

SUGGESTED USE

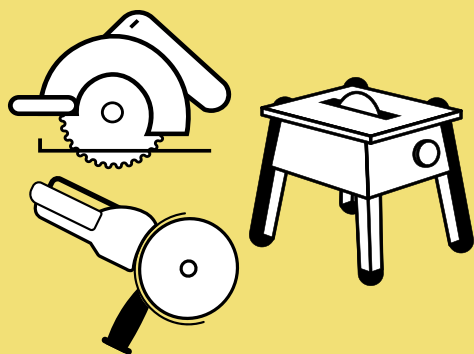

CIRCULAR SAWS  
GRINDERS  
TABLE SAWS

AMP RATINGS

15  
AMPS


15  
AMPS

15  
AMPS

25'

50'


100'

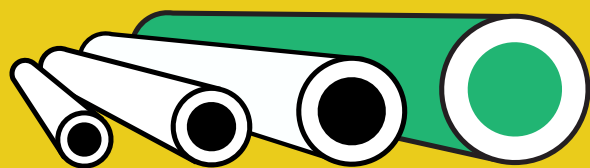

# 10 GAUGE

EXTRA HEAVY DUTY

SUGGESTED USE

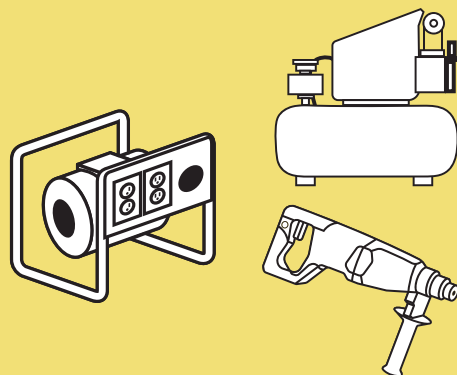

GENERATORS  
COMPRESSORS  
ROTARY HAMMERS

AMP RATINGS

20  
AMPS


20  
AMPS

20  
AMPS

25'

50'

100'




USING A LARGE NUMBER GAUGE CORD  
ON A HIGH-POWER PRODUCT LIKE A SAW,  
COULD RESULT IN DAMAGE OF A SAW

# DECODING JACKET TYPES


<b>S</b>	<b>EXTRA HARD SERVICE 600V</b> <i>(if not followed by J, V, or P)</i>
<b>J</b>	<b>HARD SERVICE 300V</b>
<b>V</b>	<b>VACUUM CLEANER CORD</b> <i>(also light duty cable)</i>
<b>P</b>	<b>PARALLEL CORD</b> <i>(also known as zip cord) - Always light duty</i>
<b>E</b>	<b>THERMOPLASTIC ELASTOMER</b> <i>(UL/NEC designation ONLY)</i>
<b>O</b>	<b>OIL RESISTANT*</b>
<b>T</b>	<b>THERMOPLASTIC</b>
<b>W</b>	<b>OUTDOOR</b> <i>Includes sunlight resistant jacket and wet location rated conductors (formerly "W-A")</i>
<b>H</b>	<b>HEATER CABLE</b>
<b>VW1</b>	<b>FLAME RETARDANT</b> <i>(Vertical Specimen Flame Test)</i>
<b>FT2</b>	<b>FLAME RETARDANT</b> <i>(Horizontal Specimen Flame Test)</i>

*\*When only one "O" appears in a classification (i.e. SJEOW), only the outer jacket material is oil resistant. If two "O's" are in the classification (i.e. SE0OW), the insulation covering the conductors and the outer jacket insulation are both oil resistant.*

# NEMA CONFIGURATIONS




**NEMA  
1-15P**




**NEMA  
1-15R**




**NEMA  
5-15P**



**NEMA  
5-15R**




**NEMA  
5-20P**




**NEMA  
5-20R**




**NEMA  
L5-20P**



**NEMA  
L5-20R**




**NEMA  
L14-20P**




**NEMA  
L5-30P**




**NEMA  
L5-30R**




**NEMA  
L6-30P**



**NEMA  
L6-30R**



**NEMA  
6-50P**



**NEMA  
6-50R**



**NEMA  
14-50R**

NEMA connectors are power plugs and receptacles used in North America and other countries that follow the National Electrical Manufacturers Association's guidelines. NEMA wiring systems have current ratings ranging from 15 to 60 amps (A) and voltage ratings ranging from 125 to 600 volts (V). Non-interchangeable connectors are made up of different combinations of contact blade widths, shapes, orientations, and dimensions that are specific to each voltage, electric current carrying power, and grounding method.

# MADE IN AMERICA CUSTOM EXTENSION CORD PROGRAM

## SPEED CORDSET PROGRAM - INKJET PRINTED STANDARD CORDS:

Uses Standard 12AWG 3 Conductor SJTW/SJE00W Polar Solar Stocked Cords 50 Ft and 100 Ft Only  
4 Different Color Selections\*: NEMA 5-15 Wiring Device Lit Ends Only



**Min Run: 2,400 Ft, Max Run: 5,600 Ft**  
**1-2 Week Lead time**

\* = SJE00W Jacket Only Available in Yellow




## INKJET PRINTED SJTW STANDARD CORDS:

Uses Standard 12AWG 3 Conductor SJTW Cords Various Lengths Available  
4 Different Color Selections: NEMA 5-15 Wiring Device Type Only



**Min Run: 5,000 Ft, Max Run of 10,000 Ft**  
**6-8 Week Lead time**

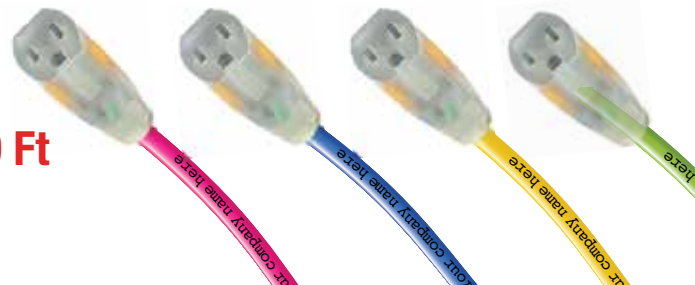

### INKJET PRINTED CUSTOM CORDS:

**6-8 Week Lead time**

**Min Run: 10,000 Ft Max Run: 50,000+\*\***

Multiple Jacket Types, Devices, Custom Colors and Stripes



### PRINT WHEEL OR INDENT CUSTOM CORDS\*:

**8-10 Week Lead time**



\*Print Wheel and Indent custom cords require customer specific wheel for legend text

\*\*Above this may extend lead time



***WE'VE GOT IT  
MADE IN AMERICA™***





# OUTDOOR EXTENSION CORDS

---

Southwire Outdoor Extension Cords are perfect for a wide range of outdoor applications. These cords come in a wide range of colors to increase visibility and prevent jobsite loss.



# OUTDOOR EXTENSION CORDS



## STANDARD OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

SJTW, SJOW, SJTOW, STW

APPLICATION

GENERAL  
OUTDOOR USE

TEMPERATURE RANGE

-40°F TO 140°F  
(-40°C TO 60°C)



## HEAVY DUTY OUTDOOR



JACKET MATERIAL

PVC

JACKET TYPE

STW

APPLICATION

THICKER JACKET THAN  
A STANDARD OUTDOOR  
CORD FOR INCREASED  
DURABILITY

TEMPERATURE RANGE

-40°F TO 140°F  
(-40°C TO 60°C)



## LOCKING & 20 AMPS



JACKET MATERIAL

PVC

JACKET TYPE

SJTW

APPLICATION

PLUGS & RECEPTACLE NEMA  
CONFIGURATIONS ARE HIGH  
AMPERAGE APPLICATIONS  
TYPICAL OF TEMP POWER  
& GENERATORS

TEMPERATURE RANGE

-40°F TO 140°F  
(-40°C TO 60°C)



# OUTDOOR CORDS

## STANDARD OUTDOOR EXTENSION CORDS WITH LIT ENDS

2487SW8804



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
540836	14/3	STW	3'	0.9 m	Red/Black	15	12
541901		SJTW	22'	7 m	Red/Black		6
2487SW8804			25'	7.6 m	Red		12
2488SW8804			50'	15.2 m	Red		6
541902					Red/Black		5
2489SW8804			100'	30.5 m	Red	13	6
2577SW000H	12/3	SJTW	25'	7.6 m	Neon Blue	15	12
2577SW000X					Neon Green		
547703					Dark Green/Yellow		
2577SW000A					Neon Pink		
2587SW8802					Yellow		
2578SW000H			50'	15.2 m	Neon Blue		8
2548SW0064					Neon Blue/Red		
2548SW00HX					Neon Blue/ Neon Green		
2548SW0052					Dark Green/Yellow		
2548SW0054					Lime Green/Red		
2578SW000X					Neon Green		
2548SW003V					Neon Orange/ Neon Blue		
2578SW000A					Neon Pink		
2548SW0077					Neon Pink/ Lime Green		
2548SW0041					Red/White		
2588SW0002					Yellow		
2548SW0022					Yellow/Purple		

# OUTDOOR CORDS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2549SW0064	12/3	SJTW	100'	30.5 m	Neon Blue/Red	15	4
2579SW000H					Neon Blue		
2549SW0054					Lime Green/Red		
2579SW000X					Neon Green		
2549SW0052					Dark Green/Yellow		
2549SW003V					Neon Orange/ Neon Blue		
2549SW0077					Neon Pink/ Lime Green		
2579SW000A					Neon Pink		
2549SW0041					Red/White		
2549SW0022					Yellow/Purple		
2589SW0002					Yellow		
2687SW0002	10/3		25'	7.6 m	Yellow	6	
26480064			50'	15.2 m	Neon Blue/Red	4	
2688SW0002					Yellow		
26490054			100'	30.5 m	Lime Green/Red	3	
2689SW0002					Yellow		



OUTDOOR CORDS | STANDARD

# OUTDOOR CORDS

## STANDARD OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS

22078803



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA  
1-15R**



**NEMA  
1-15P**



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	
22078803	16/2	SJTW	25'	7.6 m	Orange	13	12	
22088803			50'	15.2 m			6	
22098803			100'	30.5 m		10	6	
2211SW8808	16/3	SJOW	10'	3 m	Black	13	24	
2304SW8803		SJTW	10'	3 m	Orange		24	
2306SW8808			15'	4.6 m	Black		18	
2305SW8803			15'	4.6 m	Orange		18	
2307SW8803			25'	7.6 m			12	
2308SW8803			50'	15.2 m			12	
2309SW8803			100'	30.5 m			10	6
2407SW8804			14/3	25'	7.6 m		Red	15
2408SW8804				50'	15.2 m	6		
2409SW8804				100'	30.5 m	13		6
517	10/3		50'	15.2 m	Orange	15	2	
518			100'	30.5 m			2	



# OUTDOOR CORDS

## RED WHITE AND BLUE EXTENSION CORDS WITH LIT ENDS

2548SWUSA1



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill

 **WE'VE GOT IT  
MADE IN AMERICA™**



### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2547SWUSA1	12/3	SJTW	25'	7.6 m	Red/White/Blue	15	12
2548SWUSA1			50'	15.2 m			8
2549SWUSA1			100'	30.5 m			4




OUTDOOR CORDS | USA CORDS

# OUTDOOR CORDS

## TRITAP OUTDOOR EXTENSION CORDS WITH LIT ENDS

4189SW8802

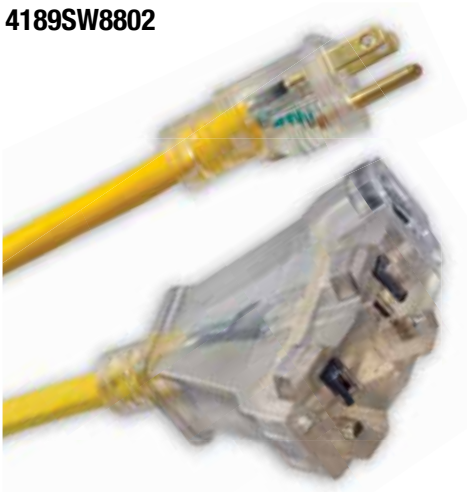

Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



NEMA  
5-15R



NEMA  
5-15P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	
4187SW8802	12/3	SJTW	25'	7.6 m	Yellow	15	12	
4188SW8802			50'	15.2 m			6	
4189SW8802			100'	30.5 m			4	
4388SW8802	10/3		50'	15.2 m			4	
4389SW8802			100'	30.5 m			3	



OUTDOOR CORDS | TRITAP CORDS

# OUTDOOR CORDS

## TRITAP OUTDOOR EXTENSION CORDS WITH NON-LIT ENDS

4004SW8803



Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA  
5-15R**



**NEMA  
5-15P**

*\* Black plugs*

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
4004SW8803	14/3	SJTW	6'	1.8 m	Orange	15	18
4217SW8804			25'	7.6 m	Red		12
4218SW8804			50'	15.2 m			6
4219SW8804			100'	30.5 m	13	6	
4112SW8802	12/3	STW	2'	0.6 m	Yellow	15	12
19100002*		SJTW	25'	7.6 m			12




OUTDOOR CORDS | TRITAP CORDS

# OUTDOOR CORDS

## 20A 5-20 EXTENSION CORD

26188802

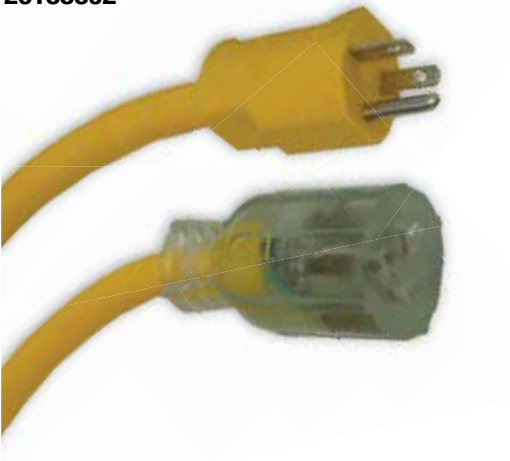

Southwire outdoor extension cords are perfect for a variety of outdoor applications. These cords come in a variety of colors to increase visibility and prevent jobsite loss.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, pressure washer, electric drill



**NEMA  
5-20P**



**NEMA  
5-20R**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
26188802	10/3	SJTOW	50'	15.2 m	Yellow	20	2
65038701					Black		



OUTDOOR CORDS | 20A 5-20

# OUTDOOR CORDS

## HEAVY DUTY OUTDOOR EXTENSION CORD

2457SW0003



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: table saw, heat gun, work light




NEMA  
5-15R



NEMA  
5-15P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2457SW0003	14/3	STW	25'	7.6 m	Orange	15	6
2458SW0003			50'	15.2 m			4
2459SW0003			100'	30.5 m		13	3
2557SW0003	12/3		25'	7.6 m		15	6
2558SW0003			50'	15.2 m			4
2559SW0003			100'	30.5 m			3

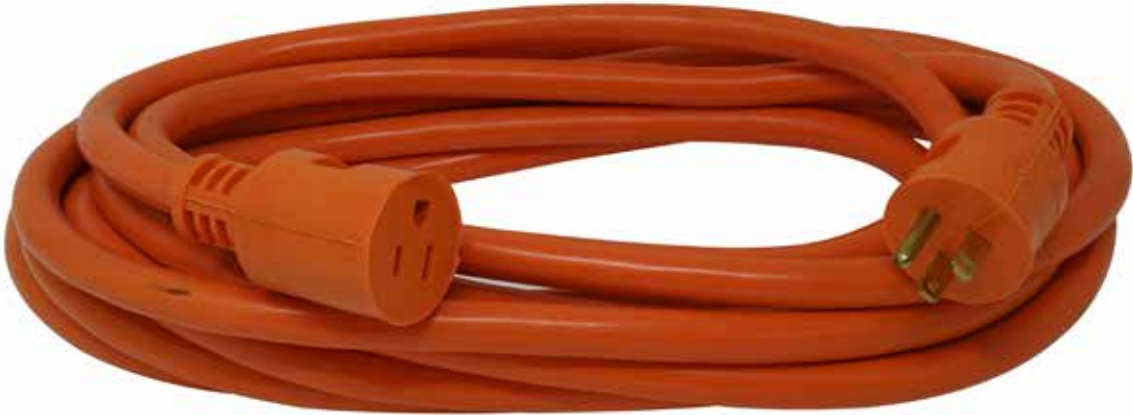

OUTDOOR CORDS | HEAVY DUTY

# OUTDOOR CORDS


## MULTI-OUTLET EXTENSION CORDS

90018802



Southwire heavy-duty extension cords have a thicker jacket than standard outdoor cords to withstand common jobsite wear and tear.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: table saw, heat gun, work light



### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	NUMBER OF OUTLETS	AMPS	CASE PACK QUANTITY
90028802*	14/3	STW	6'	1.8 m	Yellow	3	15	6
3130			9'	2.7 m	Black	3		4
90018802			25'	7.6 m	Yellow	3		4
65038901			25'	7.6 m	Black	3		2
65039101	12/3		50'	15.2 m	Black	6		2

\* Black Plugs



OUTDOOR CORDS | MULTI-OUTLET

# OUTDOOR CORDS

## PUSH-LOCK EXTENSION CORDS

24388826



Southwire push-lock extension cords keep your tools plugged in while doing common yard work.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: electric push mower, leaf blower, hedge trimmer



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
24388826	14/3	SJTW	50'	15.2 m	Yellow/Blue	15	4
24398826			100'	30.5 m		13	3
25388828	12/3		50'	15.2 m	Yellow/Black	15	4



OUTDOOR CORDS | PUSH-LOCK

# COLD WEATHER EXTENSION CORDS

---

Southwire Cold Weather Extension Cords are best used in sub-zero temperatures. Our cords are designed with special compounds in the outer jacket that stays flexible and prevents damage in freezing cold weather. We offer varieties of bright colors that are easily seen in the snow.



# COLD WEATHER CORDS



Typical extension cords become very hard to work with in the cold: the jackets will not flex and will hold their position, and in some cases, the jacket will become brittle and break, creating a loss in your your electrical connection or exposing copper and creating an unsafe working condition.

If you are working in a cold environment, you need the right cold weather extension cord for the job.



**COLD WEATHER**

# COLD WEATHER CORDS



**COLD FLEX™**



**JACKET MATERIAL**

**TPE**

**JACKET TYPE**

**COLD FLEX SJTW**

**APPLICATION**

**GENERAL COLD WEATHER  
LESS FLEXIBLE IN EXTREME  
LOW TEMPERATURES**

**TEMPERATURE RANGE**

**-58°F TO 140°F  
(-50°C TO 60°C)**



**POLAR/SOLAR®**



**JACKET MATERIAL**

**TPE**

**JACKET TYPE**

**SJE00W**

**APPLICATION**

**COLD OR HOT  
OUTDOOR  
ENVIRONMENTS**

**TEMPERATURE RANGE**

**-58°F TO 221°F**  
(-50°C TO 105°C)



**POLAR/SOLAR®  
SUPREME**



**JACKET MATERIAL**

**PREMIUM TPE**

**JACKET TYPE**

**SJEOW**

**APPLICATION**

**EXTREME COLD  
OR HOT OUTDOOR  
ENVIRONMENTS**

**TEMPERATURE RANGE**

**-94°F TO 221°F**  
(-70°C TO 105°C)



# COLD WEATHER CORDS


## POLAR/SOLAR™ SUPREME COLD WEATHER EXTENSION CORD

1439SW0061




Polar/Solar™ supreme cold weather extension cords are formulated to offer superior jobsite performance in extremely cold weather.

- Temperature rating of -94°F to 221°F (-70°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1437SW0061	14/3	SJE0W	25'	7.6 m	Blue/White	15	12
1438SW0061			50'	15.2 m		15	6
1439SW0061			100'	30.5 m		13	6
1637SW0061	12/3		25'	7.6 m		15	12
1638SW0061			50'	15.2 m		15	6
1639SW0061			100'	30.5 m		15	4

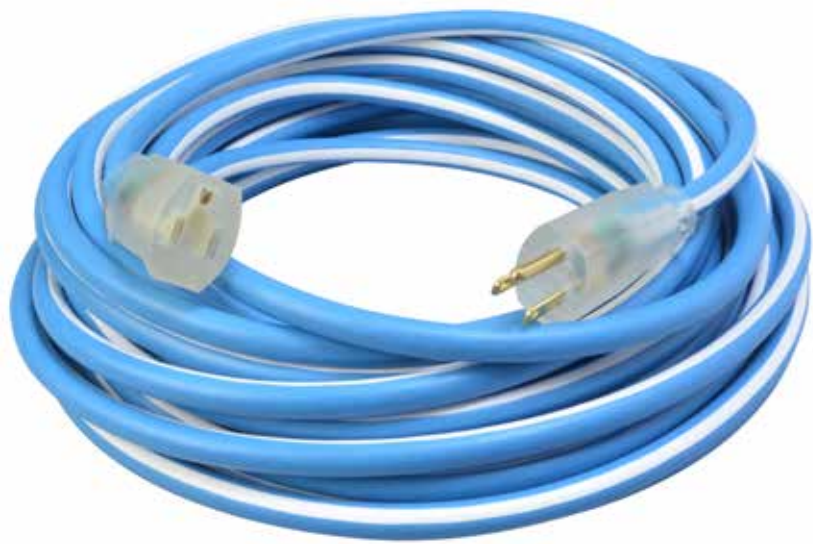

COLD WEATHER CORDS | POLAR/SOLAR™ SUPREME

# COLD WEATHER CORDS

## POLAR/SOLAR™ COLD WEATHER EXTENSION CORD

1287SW0002



Polar/Solar™ cold weather extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1287SW0002	16/3	SJE0W	25'	7.6 m	Yellow	13	12
1288SW0002			50'	15.2 m			12
1289SW0002			100'	30.5 m			6
14840002	14/3	SJE00W	10'	3 m	Yellow	15	24
1487SW0002			25'	7.6 m		15	12
1488SW0002			50'	15.2 m			12
1489SW0002			100'	30.5 m		13	6
1427SW0008	14/3		25'	7.6 m	Black	15	12
1428SW0008			50'	15.2 m			6
1429SW0008			100'	30.5 m			6
1687SW0002	12/3		25'	7.6 m	Yellow	15	12
1688SW0002			50'	15.2 m			6
1689SW0002			100'	30.5 m			4
1628SW0008	12/3		50'	15.2 m	Black		6
1629SW0008			100'	30.5 m			4
1787SW0002	10/3		25'	7.6 m	Yellow		6
1788SW0002			50'	15.2 m			4
1789SW0002			100'	30.5 m			3



**COLD WEATHER CORDS** | POLAR/SOLAR™

# COLD WEATHER CORDS

## POLAR/SOLAR™ 3-OUTLET SJE00W COLD WEATHER EXTENSION CORD

3487SW0002



Polar/Solar™ 3-outlet cold weather extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill




NEMA  
5-15R



NEMA  
5-15P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3487SW0002	12/3	SJE00W	25'	7.6 m	Yellow	15	12
3488SW0002			50'	15.2 m			6
3489SW0002			100'	30.5 m			4
3588SW0002	10/3	SJE00W	50'	15.2 m	Yellow	15	4
3589SW0002			100'	30.5 m			3

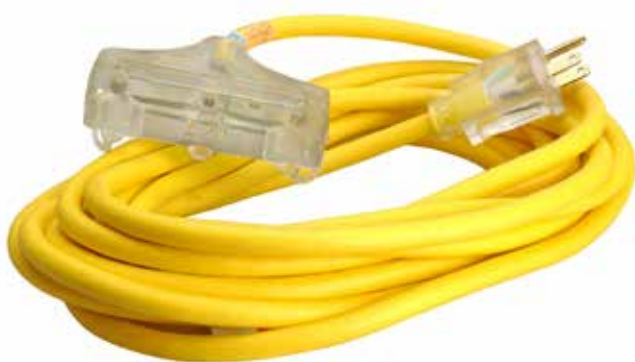

## POLAR/SOLAR™ 3-OUTLET SE00W COLD WEATHER EXTENSION CORD

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3482SW8802	12/3	SE00W	2'	0.61 m	Yellow	15	15

# COLD WEATHER CORDS

## POLAR/SOLAR™ HEAVY-DUTY COLD WEATHER EXTENSION CORDS

1567SW0002



Polar/Solar™ heavy-duty cold weather extension cords are built to stay flexible under the most extreme temperatures.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: cable puller, chop saw, rotary hammer drill



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
1567SW0002	14/3	SE00W	25'	7.6 m	Yellow	15	6
1568SW0002			50'	15.2 m			4
1569SW0002			100'	30.5 m			3
1767SW0002	12/3		25'	7.6 m		15	6
1768SW0002			50'	15.2 m			4
1769SW0002			100'	30.5 m			3



**COLD WEATHER CORDS** | POLAR/SOLAR™ HEAVY DUTY

# COLD WEATHER CORDS

## COLD FLEX™ COLD WEATHER EXTENSION CORDS

2367SW8806



ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature rating of -58°F to 140°F (-50°C to 60°C)
- 125 voltage rating
- Common applications: snow thrower, electric chainsaw, work light



NEMA  
5-15R



NEMA  
5-15P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JAKCET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2367SW8806	16/3	ColdFlex SJTW	25'	7.6 m	Blue	13	12
2368SW8806			50'	15.2 m		13	12
2436			100'	30.5 m		10	6
2467SW8806	14/3		25'	7.6 m		15	6
2468SW8806			50'	15.2 m		15	6
2469SW8806			100'	30.5 m		13	3
2437	12/3		25'	7.6 m		15	12
2568SW0006			50'	15.2 m		15	3
2569SW0006			100'	30.5 m		15	4



COLD WEATHER CORDS | COLD FLEX™

# COLD WEATHER CORDS

## COLD FLEX™ 3-OUTLET COLD WEATHER EXTENSION CORDS

32688806



ColdFlex™ extension cords withstand harsh, winter temperatures, and have a highly visible bright blue jacket to increase safety.

- Temperature rating of -58°F to 140°F (-50°C to 60°C)
- 125 voltage rating
- Common applications: snow thrower, electric chainsaw, work light



NEMA  
5-15R



NEMA  
5-15P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
32678806	14/3	ColdFlex SJTW	25'	7.6 m	Blue	15	6
32688806			50'	15.2			



COLD WEATHER CORDS | COLD FLEX™

# TWIST LOCK & GENERATOR EXTENSION CORDS

---


Southwire Twist Lock Extension Cords have a unique blade design that allows the cords to lock into receptacles or outlets with a simple twist action. We offer a vast selection of Generator Extension Cords with different amperage levels for different needs.




# TWIST LOCK & GENERATOR

Having the right plug and receptacle is essential to getting the job done. Southwire has a broad assortment of cords and adapters to help you deliver power to where you need it as efficiently as possible.


## COMMON GENERATOR NEMA CONFIGURATIONS




**NEMA  
5-15R**



**NEMA  
5-15P**




**NEMA  
5-20P**




**NEMA  
5-20R**




**NEMA  
L5-20P**



**NEMA  
L5-20R**




**NEMA  
6-20P**




**NEMA  
6-20R**




**NEMA  
L14-20P**



**NEMA  
L14-20R**




**NEMA  
L5-30P**




**NEMA  
L5-30R**



**NEMA  
L14-30P**




**NEMA  
L14-30R**




**NEMA  
TT-30P**



**NEMA  
TT-30R**



**NEMA  
10-50P**




**NEMA  
10-50R**

When considering what generator cables and adapters you need for a project, you want to avoid voltage drop from the generator. To do this, utilize as short a cable as possible, along with the largest conductor (smallest AWG) and a connector with as high amperage and voltage rating possible. For instance, you will get less power and greater voltage drop out of a generator using a 100' 15 amp 12/3 extension cord with 5-15 plugs compared to a 50' 20 amp 10/3 extension cord with a 5-20 plug.

# TWIST LOCK & GENERATOR

## L5-20 TWIST LOCK EXTENSION CORDS

9208SW8802

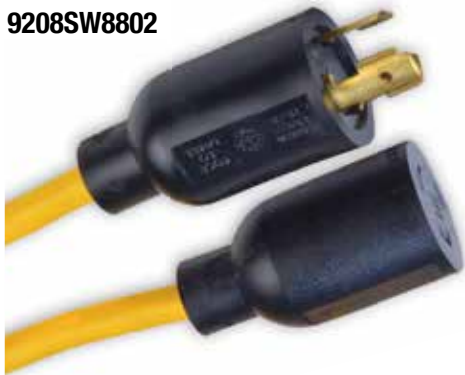



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA L5-20P



### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
9208SW8802	12/3	SJTW	50'	15.2 m	Yellow	20	6		
90288802		STW					4		
9209SW8802		SJTW	100'	30.5 m		15			

## L14-30 TWIST LOCK EXTENSION CORDS

65038801





Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA L14-30P



### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
65172740	10/4	STW	10'	3.05 m	Yellow	30	6	 NEMA L14-30P	 NEMA L14-30R
65172840			20'	6.1 m			6		
65038801			25'	7.6 m	Black		2		
65173140			50'	15.24 m	Yellow		2		

# TWIST LOCK & GENERATOR

## GENERATOR ADAPTERS CONVERT TO 20A (5-20R)





19248802



Southwire generator adapters provide more usable receptacles during temporary power outages and on jobsites.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating

## SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19158802	10/3	STW	3'	0.9 m	Yellow	15	4	 NEMA L5-30P	 NEMA 5-20R Lighted
19248802	12/4					20		 NEMA L14-20P	
19348802	10/4					20		 NEMA L14-30P	

# TWIST LOCK & GENERATOR

## TWIST LOCK ADAPTERS

9208SW8802



Southwire twist-to-lock adapters easily convert plugs and receptacles to fit your specific application.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump


## SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
92088802	12/3	STW	9"	0.2 m	Yellow	15-20	10	 NEMA 5-15P	 NEMA L5-20R
90218802			9"	0.2 m		15-20		 NEMA L5-20P	 NEMA 5-15R
90228802			20"	0.5 m		20			 NEMA L5-20R (x2)
90238802			2'	0.6 m		20			 NEMA L5-20R (x3)
90848802			2'	0.6 m		15	6		 NEMA 5-15R Lighted Tritap
18640008	10/4	SE00W	10'	3.05 m	Black	50	4	 NEMA 14-50P	 NEMA L14-30R
18540008				3.05 m		30	4	 NEMA L14-30P	 NEMA L14-30R

# TWIST LOCK & GENERATOR

## 5-15 ADAPTERS

90188802

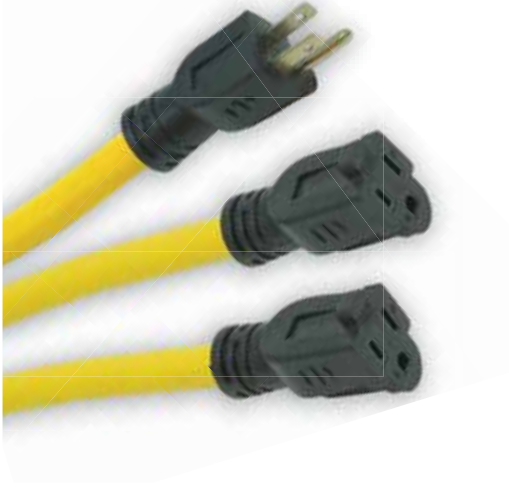




Southwire adapters transform your single outlet into multiple outlets.

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, rv

## SPECIFICATIONS

*\*Black plugs*

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
90188802*	12/3	STW	2'	0.6 m	Yellow	15	12	 NEMA 5-15P	 NEMA 5-15R (x2)
90198802*									 NEMA 5-15R (x3)

# SPECIALTY EXTENSION CORDS & POWER DELIVERY

---

Southwire specialty cords provide a broad assortment of cables to suit your needs. These cords are designed to resist damage against high- powered machinery while also being oil, solvent, and water resistant.



**ROYAL®**



**JACKET MATERIAL**

**OIL-RESISTANT RUBBER**

**JACKET TYPE**

**SJ00W**

**APPLICATION**

**HARSH GARAGE  
& WELDING  
ENVIRONMENTS**

**TEMPERATURE RANGE**

**-40°F TO 195°F**  
(-40°C TO 60°C)



**AGRIPRO™**



**JACKET MATERIAL**

**OIL-RESISTANT VINYL**

**JACKET TYPE**

**SJE0W/SJ0W/SJT0W**

**APPLICATION**

**HARSH GARAGE  
& AGRICULTURAL  
ENVIRONMENTS**

**TEMPERATURE RANGE**

**-40°F TO 140°F**  
(-40°C TO 91°C)



# SPECIALTY EXTENSION CORDS



## ROYAL® WELDING CORDS

The flow of most devices that need power is fairly consistent. Welders, on the other hand, must change the flow to melt metals and connect work parts. Although these settings are regulated on the welder rather than at the power source, the extension cord that brings the power supply must be able to handle them. That's why voltage, gauge, length, and durability are all important considerations to make welding extension cord safe.

Southwire's Royal welding cords are specifically designed to resist damage from slag while also being oil, solvent, and water resistant.



# SPECIALTY EXTENSION CORDS

## ROYAL® OUTDOOR EXTENSION CORDS

3677SW0008



Royal® extension cords are resistant to welding slag and are the most flexible extension cord on the market.

- Temperature rating of -40°F to 194°F (-40°C to 90°C)
- 125 voltage rating
- Abrasion, chemical, and oil resistant
- Common applications: welder, angle grinder, rotary hammer drill



NEMA  
5-15R



NEMA  
5-15P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3687SW0002	12/3	SJ00W	25'		Yellow	15	12
3676SW0008			40'	12.19 m	Black		6
3678SW0008			50'	15.2 m	Black		6
3688SW0002			80'	24.38 m	Yellow		3
3680SW0008			100'	30.5 m	Black		4
3679SW0008					Yellow		
3689SW0002					Yellow		



SPECIALTY CORDS | ROYAL® CORDS

# SPECIALTY EXTENSION CORDS

## 6-50 WELDER EXTENSION CORD



19178806



Southwire twist lock extension cords are designed to keep your jobsite under continuous operation.



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: generator, pool pump
- NEMA 6-50R/6-50P

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19178806	8/3	STW	25'	7.6 m	Blue	40	2	 NEMA 6-50P	 NEMA 6-50R
19228806			50'	15.2 m					

## WELDING PLUG ADAPTER

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
19408808	8/3	STW	1.5'	0.46 m	Black	40	12	 NEMA 14-50P	 NEMA 6-50R

# SPECIALTY EXTENSION CORDS



## AGRIPRO™ CORDS

Oil Resistant Cords (SJTOW) are designed to withstand harsh conditions where fuel and fertilizers are often used. When basic SJTW cords come into contact with common chemicals, they can swell and become brittle.



**SPECIALTY CORDS** | AGRIPRO™

# SPECIALTY EXTENSION CORDS

## AGRIPRO™ OIL RESISTANT EXTENSION CORD

12770008



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS


STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
12270008	16/3	SJEOW	25'	7.6 m	Black	13	12
12280008			50'	15.2 m			12
64815701	14/3	SJTOW	25'	7.6 m		15	12
64816001			50'	15.2 m			6
64816301			100'	30.5 m		13	4
67729001	12/3		25'	7.6 m		15	12
64816901			50'	15.2 m			6
64817201			100'	30.5 m			4
64817501	10/3		25'	7.6 m			6
64817801			50'	15.2 m			4
64818101			100'	30.5 m			3



# SPECIALTY EXTENSION CORDS

## AGRIPRO™ 3-OUTLET OIL RESISTANT EXTENSION CORD

54533501

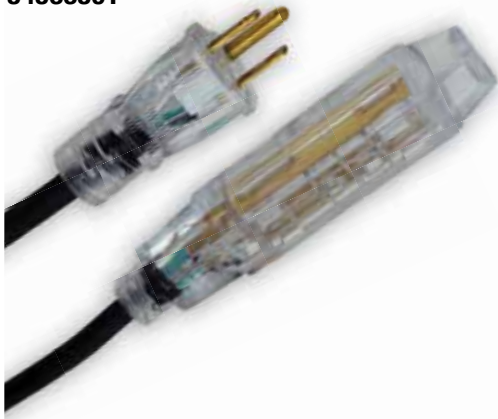

Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw



**NEMA  
5-15R**



**NEMA  
5-15P**

*\* Lighted Banana Receptacle*

*\*\* Rated for Indoor Use*

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
54533501 ***	14/3	SJOW	15'	4.6 m	Black	15	18

## AGRIPRO™ TRITAP OIL RESISTANT EXTENSION CORD

2451



Agri-Pro™ extension cords are ideal for farm, ranch, and workshop jobs.

- Temperature rating of -58°F to 221°F (-50°C to 105°C)
- 125 voltage rating
- Abrasion, chemical and oil resistant
- Common applications: air compressor, chop saw, electric chain saw



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
2451	14/3	SJTOW	25'	7.6M	Black	15	12

# RANGE • DRYER • APPLIANCE • REPLACEMENT CORDS

---

Southwire offers a variety of in-home replacement cords providing multiple options for different plug configurations, and strain relief clamps help prevent cord damage.



# RANGE · DRYER · APPLIANCE

## RANGE AND DRYER CORDS

9014SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125/250 voltage rating

## SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	NUMBERS OF WIRES	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG
9014SW8809	6/2-8/1	SRDT Flat	3	4'	1.2 m	Gray	50	6	NEMA 10-50P
9016SW8809			3	6'	1.8 m			6	
9044SW8808	6/2-8/2	SDRT Round	4	4'	1.2 m			6	NEMA 14-50P
9046SW8808			4	6'	1.8 m			6	
544094	8/2-10/2		4	5'			40	8	
544147			4	5'				15	
544120	10/2	DRT	3	5'	1.5 m	Black	30	8	NEMA 14-30P
544150			3	5'			40	15	NEMA 14-50P
9124SW8809	10/3	SDRT Flat	3	4'	1.2 m	Gray	30	6	NEMA 10-30P
9126SW8809			3	6'	1.8 m		30	6	
9154SW8808	10/4	SDRT Round	4	4'	1.2 m	Black	30	6	NEMA 14-30P
9156SW8808			4	6'	1.8 m		30	6	

## ELECTRIC OUTLET GAS RANGE ADAPTER 250V TO 125V

9042SW8801



- Converts a 220V Outlet to 120V
- Commonly used when installing an electric range where a gas range previously worked
- Helps avoid re-wiring an outlet in a home

STOCK #	COLOR	AMPS	CASE PACK QUANTITY	NEMA PLUG	NEMA RECEPTACLE
9042SW8801	White with Black Pull Handle	15	4	NEMA 14-50P	NEMA 5-15R

RANGE & DRYER | CORDS & ADAPTER

# RANGE · DRYER · APPLIANCE

## GARAGE & WORKSHOP REPLACEMENT POWER SUPPLY CORDS

9853SW0008



- Temperature rating of:
  - SJEOW -58°F to 221°F (-50°C to 105°C)
  - SJT -40°F to 140°F (-40°C to 60°C)
  - SE00W -58°F to 221°F (-50C to 105°C)
- 125 voltage rating
- Common applications: electric trimmer, electric chainsaw, air compressor



**NEMA  
5-15P**



**\*NEMA  
1-15P**


\*2 Prong

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9853SW0008*	16/2	SJEOW	6'	1.8 m	Black	13	50
9854SW0008*			9'	2.7 m			50
98388808	16/3	SJT	2.5'	0.7 m			100
9855SW0008		SJEOW	6'	1.8 m			50
9856SW0008			9'	2.7 m			50
9857SW0008			6'	1.8 m		15	25
9858SW0008	14/3		9'	2.7 m			25
90110008	12/3	SE00W	2'	0.6 m			50
90120008			2'	0.6 m			50

## INDOOR ROUND REPLACEMENT POWER SUPPLY CORDS

9702SW8808

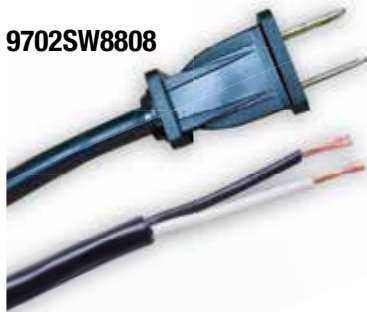

- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 voltage rating
- Common applications: vacuum, electric drill, work light



**NEMA  
5-15P**



**\*NEMA  
1-15P**

\*2 Prong

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9702SW8808*	16/2	SJTW	6'	1.8 m	Black	13	25
9703SW8808	16/3		3'	0.9 m			
9706SW8808			6'	1.8 m			
9709SW8808			9'	2.7 m			
9716SW8808	14/3		6'	1.8 m		15	
9719SW8808			9'	2.7 m			

# RANGE · DRYER · APPLIANCE

## INDOOR FLAT REPLACEMENT POWER SUPPLY CORDS

9723SW8809



- Temperature rating of -40°F to 140°F (-40°C to 60°C)
- 125 Voltage rating
- Common applications: microwave, refrigerator, dehumidifier



### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JAKCET TYPE	NUMBERS OF WIRES	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
9723SW8809	16/3	SPT-3	Right Angle	3'	0.9 m	Gray	13	25
9733SW8809			Straight	3'	0.9 m			
9724SW8809			Right Angle	4'	1.2 m			
9734SW8809			Straight	4'	1.2 m			
9726SW8809			Right Angle	6'	1.8 m			
9736SW8809			Straight	6'	1.8 m			
9743SW8823	14/3		Straight	3'	0.9 m	Beige	15	
9743SW09			Straight	3'	0.9 m	Gray		
9746SW8823			Straight	6'	1.8 m	Beige		
98700009			12/3	Right Angle	6'	1.8 m		

APPLIANCE | POWER SUPPLY

# RANGE • DRYER • APPLIANCE

## 125V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3531SW3323



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125 voltage rating (250 voltage rating for 3537SW8809)
- Common applications: air conditioner, space heater, refrigerator



**NEMA  
5-15R**



**NEMA  
5-15P**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3531SW3323	14/3	SPT-3	3'	0.9 m	Beige	15	36
3532SW3323			6'	1.8 m	Beige		24
3533SW3323			9'	2.7 m	Beige		15
3535SW3323			12'	3.7 m	Beige		12
3536SW3323			15'	4.6 m	Beige		12

## 250V INDOOR MAJOR APPLIANCE REPLACEMENT CORDS

3537SW8809



- Temperature rating of -4°F to 140°F (-20°C to 60°C)
- 125 voltage rating (250 voltage rating for 3537SW8809)
- Common applications: air conditioner, space heater, refrigerator



**NEMA  
6-20P**



**NEMA  
6-20R**

### SPECIFICATIONS

STOCK #	GAUGE CONDUCTOR	JACKET TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	AMPS	CASE PACK QUANTITY
3537SW8809	12/3	SPT-3	9'	2.7 m	Gray	20	18

# CORD MANAGEMENT & REELS

---

Southwire cord organization options for keeping bulky extension cords, ropes, and holiday lighting tangle free.



# CORD MANAGEMENT

## CORD ORGANIZATION CORD STORAGE WRAPS

64827501



### SPECIFICATIONS

STOCK #	DESCRIPTION	HOLDS	COLOR	CASE PACK QUANTITY
64827501	Resin Cord Wrap With Stand	100' of 14/3 Gauge Cord	Yellow	10
2803	Black, Mountable H-Frame Extension Cord Reel	100' of 16/3 gauge cord	Black	12
64827801	Resin Cord Wrap With Integrated Tritap Adapter	50' of 14/3 Gauge Cord	Black	3
E101	Yellow, Mountable Cord Storage Extension Cord Reel	100' of 16/3 gauge cord	Yellow	24
502805	Black Cord Caddy H-Rack Tray Pack	50' of 14/3 gauge cord	Black	24

## CORD STORAGE REEL

E-230



### SPECIFICATIONS

*\*with metal stand*

STOCK #	DESCRIPTION	HOLDS	COLOR	CASE PACK QUANTITY
E102	Extension Cord Storage Reel	150' Of 16/3, 125' Of 14/3, And 75' Of 12/3	Red/Black	8
22849*	Extension Cord Reel With Metal Stand	Holds 100' Of 14/3 Gauge Cords	Black	6
64827201	Black, Extension Cord Storage Wheel	150' of 16/3 , 125' of 14/3, 75' of 12/3	Black	8
E103	Extension Cord Storage Wheel	Holds 125' Of 14/3 Gauge Cord	Red/Black	4
E230*	Resin Reel With Metal Stand And Four Grounded Outlets	50' of 12/3 Gauge Cord	Black/Yellow	4
547702	Extension Cord Storage Wheel	150' of 16/3 Gauge Cord	Black	8

# CORD MANAGEMENT

## CORD REELS

E-235



E238



E2801



## SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	CASE PACK QUANTITY
E235	Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker	14/3	SJTW	50'	15.2 m	Red/Black/ Yellow	2
E238	Power Station Cord Reel With Metal Stand, 6 Grounded Outlets, And On Off Switch And Built In Circuit Breaker	12/3	SJTW	50'	15.2 m	Green/Black/ Yellow	2
2801	Portable Extension Cord Reel Power Station, 4 Grounded Outlets	16/3	SJT	25'	7.6 m	Black/Yellow	3
4907	Extension cord Reel with 4 Grounded Outlets	16/3	SJTW	25'	7.6 m	Black/Yellow	4
545794	Cord Caddy Self-Storing Extension Cord with 4 Grounded Outlets	16/3	SJTW	32.81'	10 m	Orange	6

# CORD MANAGEMENT

## RETRACTABLE CORD REELS WITH LIGHTED TRITAP

E315



E215



48006SW



### SPECIFICATIONS

\*Black Tri-Tap ^Banana Plug

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
E315	Retractable Extension Cord Reel	16/3	SVT	20'	6.1 m	Black/Yellow	3	13	4
E215^	Metal Retractable Extension Cord Reel With Lighted End	16/3	SJT	30'	9.1 m	Silver/Black	3	13	2
48006SW*	Metal Retractable Extension Cord Reel	14/3	SJTW	30'	9.1 m	Red/Black	3	15	3
48208802SW	Retractable Extension Cord Reel With Lighted End	12/3	SJTW	50'	15.2 m	Black/Yellow	3	13	1

## RETRACTABLE CORD REEL WITH LOCKING PLUG

48004



### SPECIFICATIONS

STOCK #	DESCRIPTION	GAUGE CONDUCTOR	WIRE TYPE	LENGTH (FT)	LENGTH (M)	CORD COLOR	OUTLETS	AMPS	CASE PACK QUANTITY
48004	Metal Retractable Extension Cord Wheel With Locking Plug	14/3	SJTW	30'	9.1 m	Red/Black	1	15	3

# NOTES


# NOTES

# NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

# NOTES

# NOTES

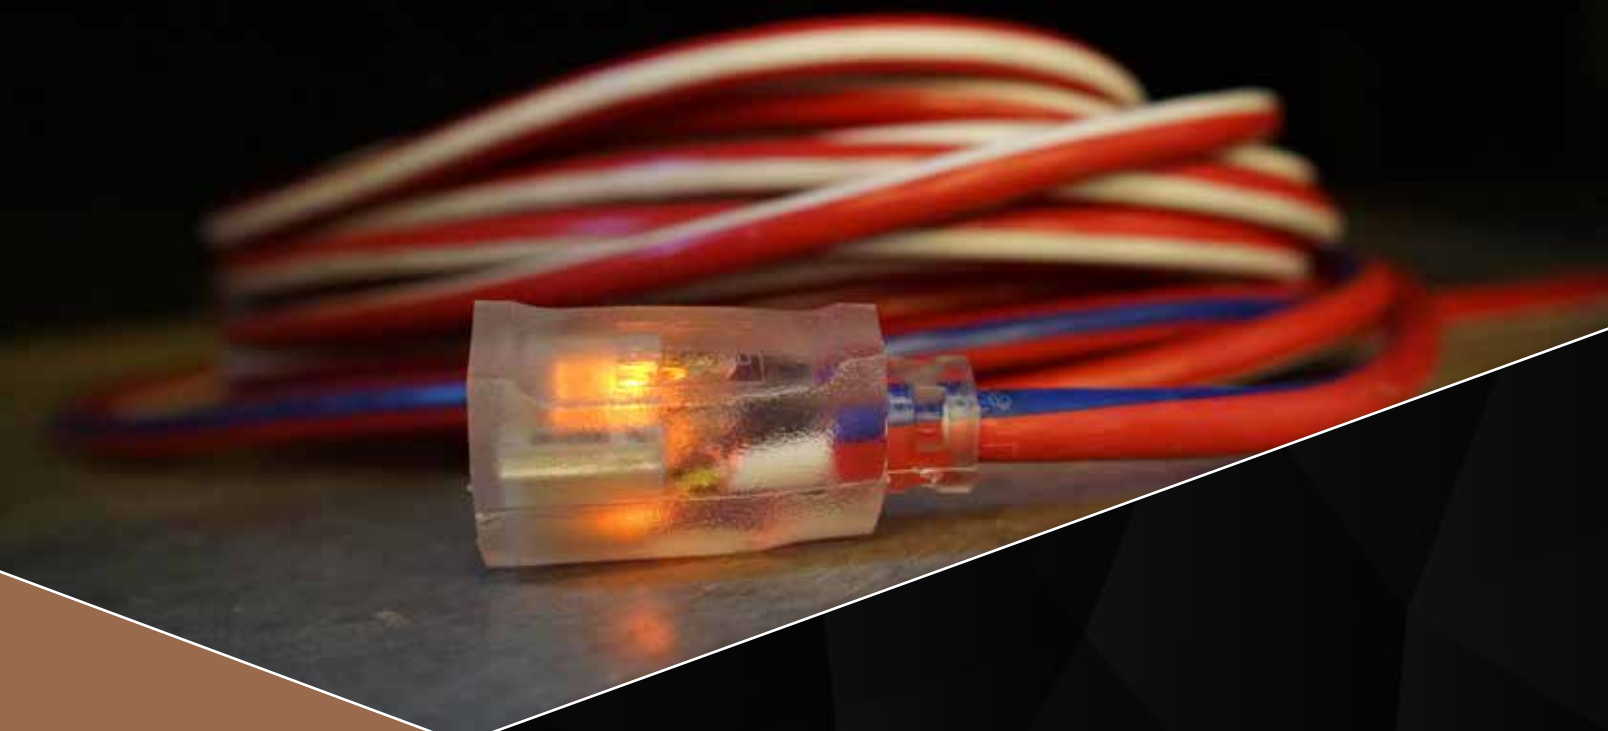

**Southwire™**

# **CORD SOLUTIONS**

## **CATALOG**

**get social with us:**



**/SOUTHWIRETOOLS**



**/SOUTHWIRE-COMPANY**



**@SOUTHWIRETOOLS**



**@SOUTHWIRE**



SCAN TO LEARN MORE

**WWW.SOUTHWIRE.COM | 1-855-SWT00LS**

All Trademarks or Registered Trademarks (TM/®) are owned or licensed by Southwire Company.  
Any other TM/®- Trademark or Registered Trademark of Southwire Company.